



Topic: Premium Utility Center Installation

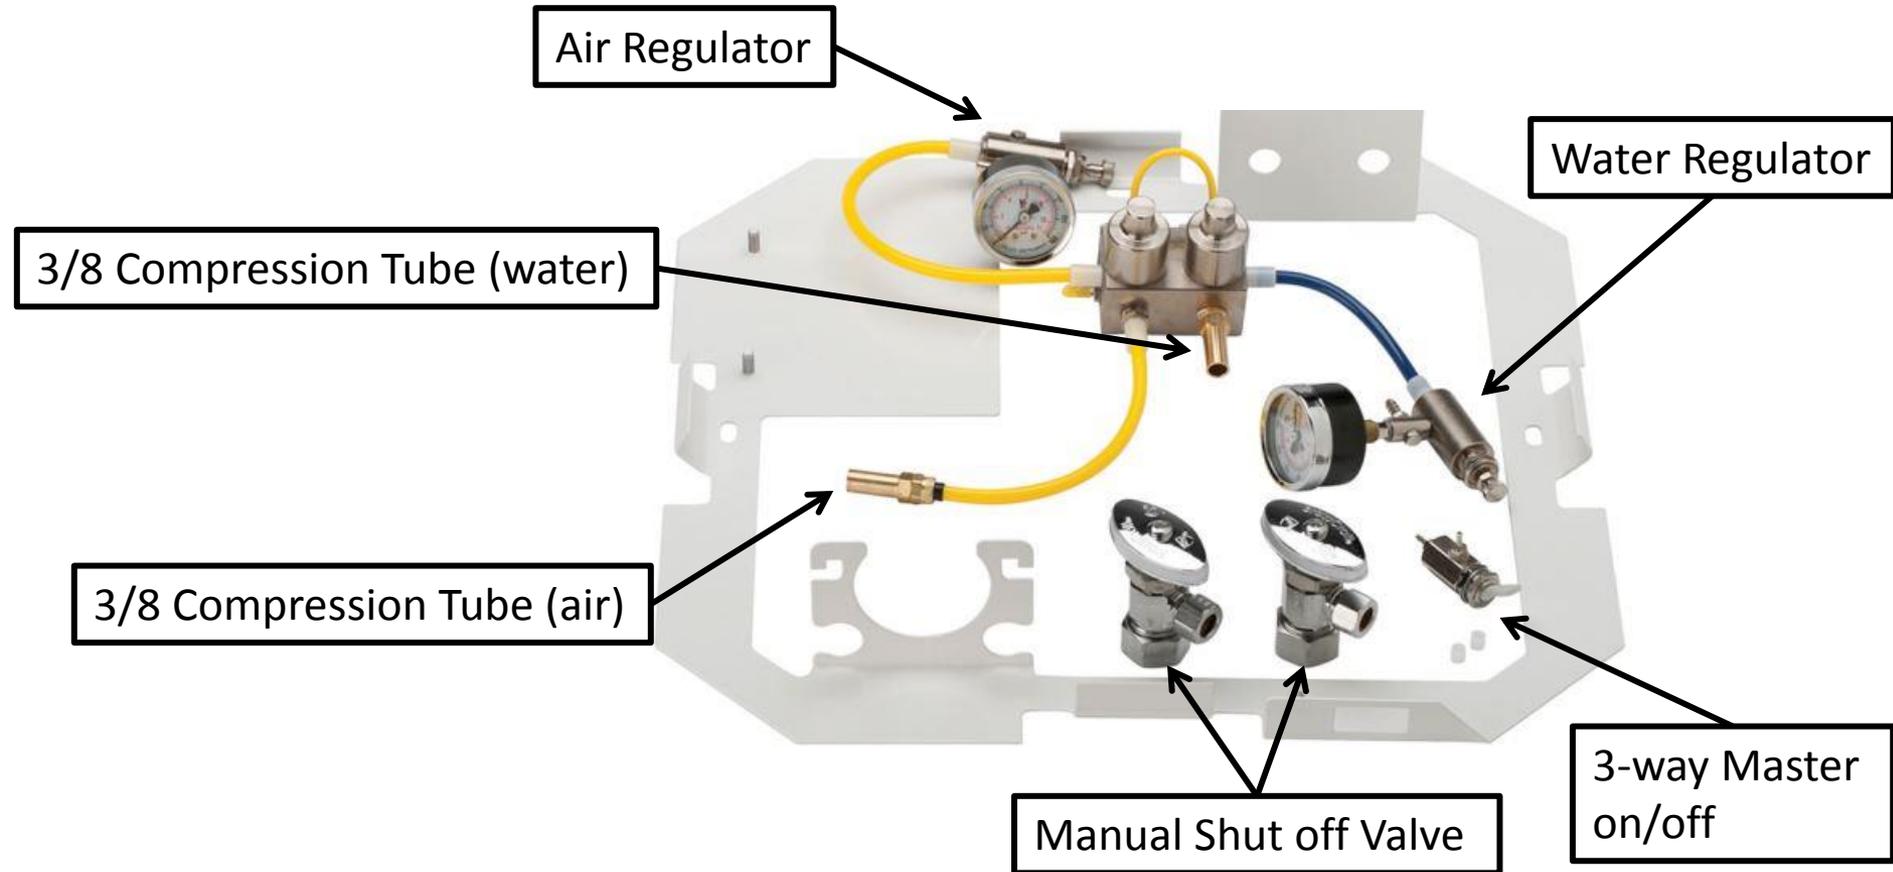


Topic: Premium Utility Center Installation

Hold the compression tube in place with a 7/16 wrench. Firmly tighten the nut on the manual shut off valve with a 5/8 wrench on both air and water connections.

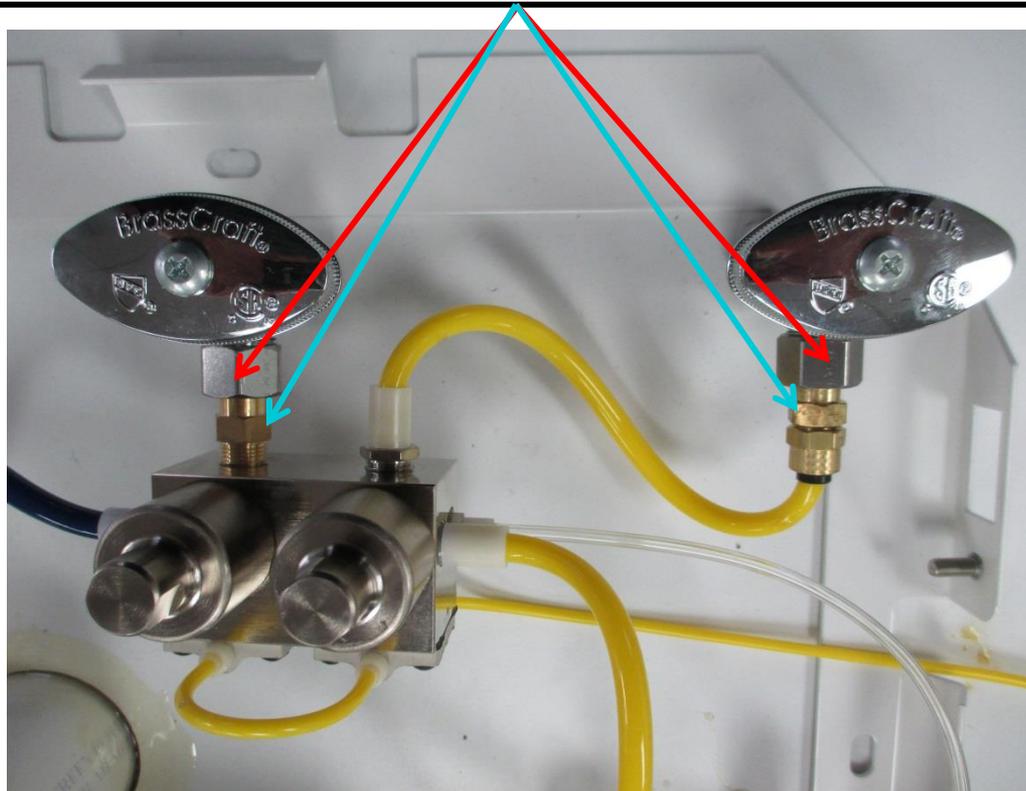

Topic: Premium Utility Center Installation

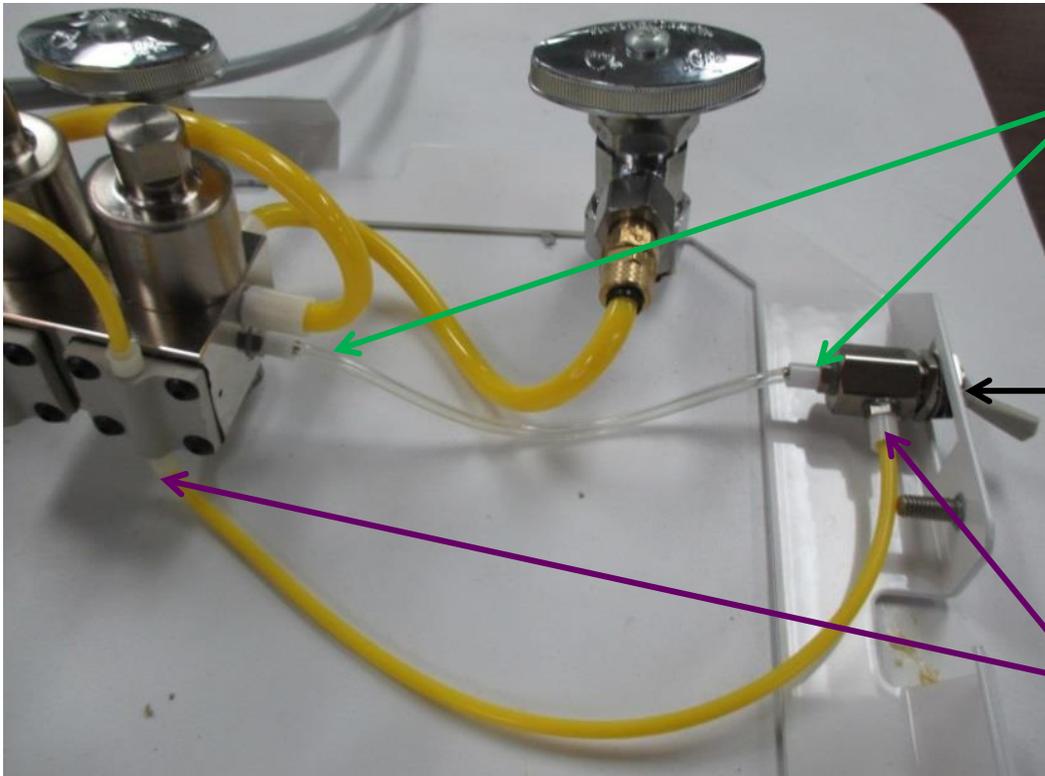

Connect constant air to the barb farthest away from the toggle (input) on the master on/off valve.

The master on/off valve is most often located on the unit head.

Connect the barb closest to the toggle (output) on master on/off to the empty barb on the plastic cap.